



UNILUX

LEDDY




Reference : 400124563



Reference : 400165031



LEDDY combines three-level adjustable lighting, soft and even illumination thanks to its frosted glass shade, and precise orientation for optimal visual comfort. Its sleek, modern design, supported by a weighted base, makes it the perfect companion for elegant and well-lit workspaces.

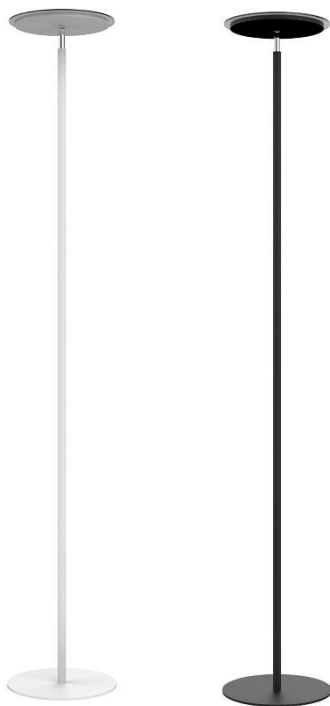

- **Adjustable brightness** : adjust the lighting to your needs throughout the day with three brightness levels, easily managed via the dimmer switch located on the pole.
- **Even lighting** : the frosted glass shade diffuses soft, indirect light without glare, making it ideal for high-quality ambient lighting.
- **Optimal illumination** : direct the light exactly where you need it with LEDDY's adjustable shade.
- **Stability** : the weighted base ensures excellent stability, even in high-traffic areas.
- **Design** : the slim pole, clean lines, and frosted glass diffuser bring a modern and airy touch to your workspace.

Height : 180 cm
Diameter of the head : 27 cm
Diameter of the base : 28 cm

Materials :


- Steel with Epoxy paint finish mast and base
- Steel with Epoxy paint finish with frosted glass head

Warranty : 2 years




Features

Lux measurement upward at 55 cm
from the light source :

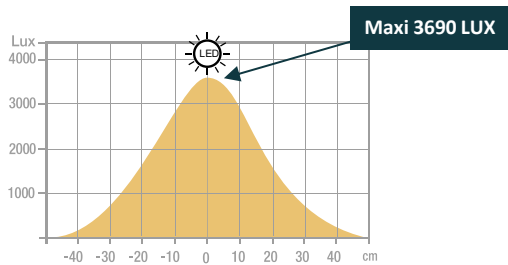

Light spectrum measurement in nanometers :

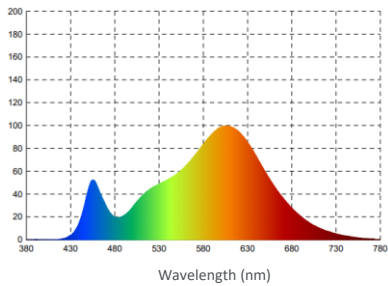

SAP. code	400165031	400124563
EAN code	3595560034406	3595560029556
Coloris	White	Black
Flux lumineux (lm)	4764	
Lux à 55 cm (indirect)	3690	
Efficacité énergétique (lm/W)	148	
T° de couleur (K)	3000	
IRC	84	
Durée de vie source (h)	40 000	
Energie consommée (kWh/1000 h)	31	
Poids net (kg)	4.3	

ABOUT UNILUX

Founded in 1952, UNILUX is a French company specializing in lighting and ergonomics. Over the past 25 years, UNILUX has become a benchmark in the field of lighting in France and throughout Europe. In 2000, UNILUX joined the French group HAMELIN, a European leader in stationery. The company modernizes and evolves to become a creator of ambiance and well-being.




OUR EXPERTISE

Indirect lighting floor lamp : an essential complementary light source

Easy to install and decorative, indirect lighting floor lamps add a unique touch while effectively illuminating a specific area.

Indirect lighting provides soft, even light, ideal for creating a warm atmosphere without harsh shadows.

Perfect as accent or ambient lighting, they deliver high-quality illumination and fit seamlessly into any professional space: offices, open-plan areas, meeting rooms, or reception halls.

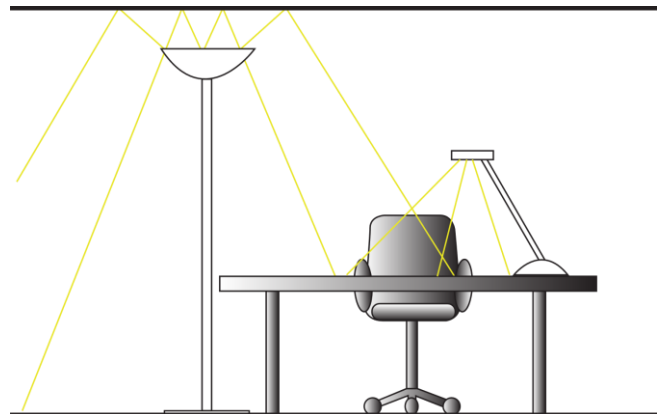

Recommended illuminance according to DIN EN 12464-1* standard for offices:

- 300 lux: deposit areas, copying zones, circulation areas.
- 500 lux: writing, reading, data processing.
- 500 lux: reception and service counters.
- 750 lux: technical drawing.

* Standard setting the limits that workplace lighting must adhere to.

ENVIRONMENT



Unilux focuses on sustainable development and takes concrete measures to reduce its environmental footprint and best meet the evolving expectations of its consumers.



We are notably committed to reduce our greenhouse gas emissions by 29% between 2021 and 2030 in response to the "Net Zero Carbon Emissions by 2050" challenge. Eco-design, emissions reduction, and continuous improvement are at the core of our concerns.

pCon Planner

Integrate Unilux products seamlessly into your 3D space designs.
Access to essential data : dimensions, prices, etc.



Website

Explore our full range, tips, blog articles, and more.



Do you have any questions ?

Our customer service is always available to assist you.

GLOSSARY



ON / OFF



Light intensity dimming



Replaceable light source (LED only) by a professional.



European compliance



Energy class

HAMELIN

BP 70122 - 14204 HEROUVILLE ST CLAIR - France

www.hamelinbrands.com

www.my-unilux.com

E-mail : contact.unilux@hamelinbrands.com

UNILUX